



ICEBERG

a luminous white block of light

DESCRIPTION

Eye catching surface mounted or suspended LED fixture. Iceberg's characteristic design is created using a thin opal polypropylene sheet, which is smartly folded into an angular shape, creating the impression of a solid block of light.

RANGE

Iceberg is available as surface mounted or suspended luminaire with a 3000lm LED output in 2700K, 3000K or 4000K. Lower lumen outputs are available upon request.

Equipped with an integrated fixed output driver or DALI driver.

POWER SUPPLY

230V (LED driver included)


INSTALLATION

Surface mounted or suspended by means of steel cables.



ICEBERG SURFACE MOUNTED

IP20 

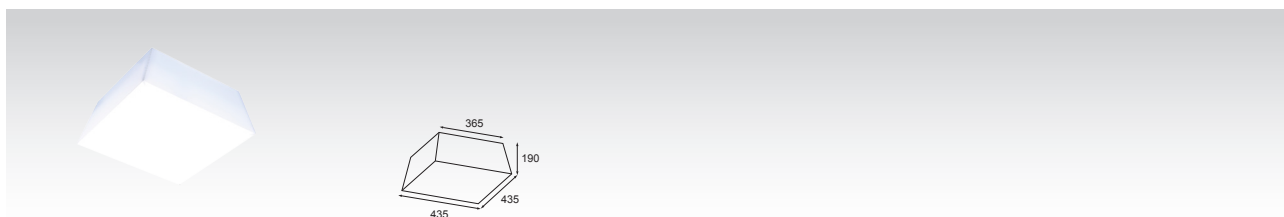


fixed output	W (system)	lm/W (system)	CRI	CCT	White structure
3000lm	35W	86lm/W	>80	2700K	903.51.2.09.0
3300lm	35W	94lm/W	>80	3000K	903.52.2.09.0
3500lm	35W	100lm/W	>80	4000K	903.53.2.09.0

DALI	W (system)	lm/W (system)	CRI	CCT	White structure
3000lm	35W	86lm/W	>80	2700K	903.51.2.09.0.DALI
3300lm	35W	94lm/W	>80	3000K	903.52.2.09.0.DALI
3500lm	35W	100lm/W	>80	4000K	903.53.2.09.0.DALI

Weight	Light source	Driver
3,70Kg	LED included	LED driver included

ICEBERG SUSPENSION

IP20 

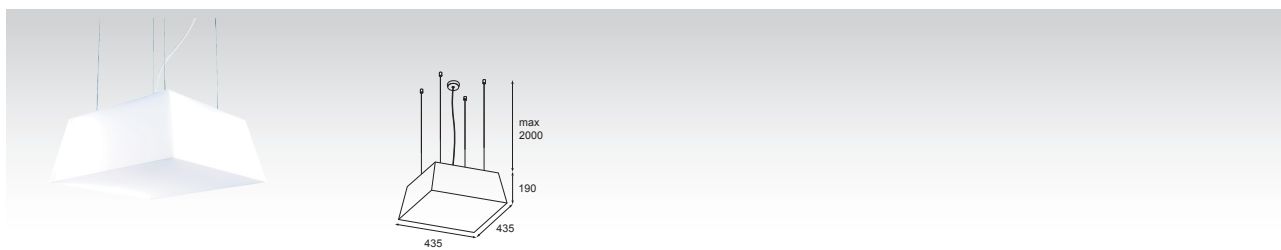

fixed output	W (system)	lm/W (system)	CRI	CCT	White structure
3000lm	35W	86lm/W	>80	2700K	903.51.2.09.1
3300lm	35W	94lm/W	>80	3000K	903.52.2.09.1
3500lm	35W	100lm/W	>80	4000K	903.53.2.09.1

DALI	W (system)	lm/W (system)	CRI	CCT	White structure
3000lm	35W	86lm/W	>80	2700K	903.51.2.09.1.DALI
3300lm	35W	94lm/W	>80	3000K	903.52.2.09.1.DALI
3500lm	35W	100lm/W	>80	4000K	903.53.2.09.1.DALI

Weight	Light source	Driver
3,70Kg	LED included	LED driver included