



# ICECUBE

Strong edges, straight lines and a diffuse lit shade, masking the integrated LED source and driver.

## DESIGN

WACO

## DESCRIPTION

Icecube is designed with a straight and sharp edged diffuser offering clear and diffused light, masking the LED source inside. The product can be customized by using different shade sizes or graphics.

## LED INFO

3 Row LED boards ensuring a high output and great efficacy.

## RANGE

Output range 1500lm (atmosphere light) or 3000lm (functional light) in 3000K or 4000K.

Equipped with an integrated fixed output driver or DALI driver.


## POWER SUPPLY

230V (LED driver included)

## INSTALLATION

Suspended by means of steel cables.



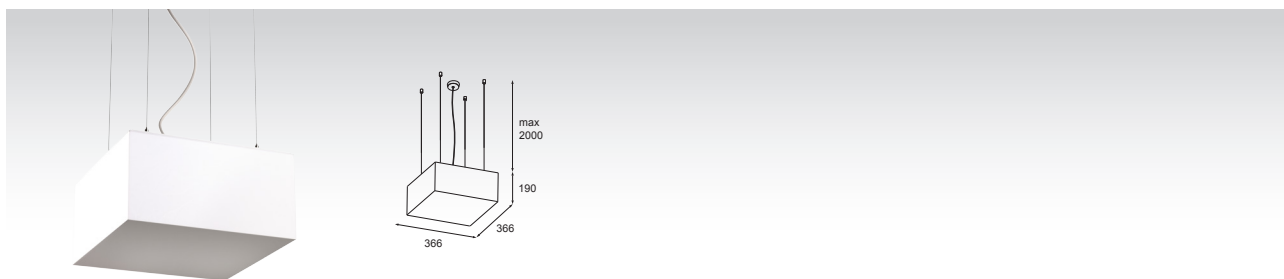

|               |                     |                      |            |            |                        |
|---------------|---------------------|----------------------|------------|------------|------------------------|
| 1500lm        | <i>W (system)</i>   | <i>lm/W (system)</i> | <i>CRI</i> | <i>CCT</i> | <i>White structure</i> |
|               | 10,7W               | 100lm/W              | >80        | 3000K      | 400.42.2.09.1          |
|               | 10,7W               | 105lm/W              | >80        | 4000K      | 400.43.2.09.1          |
| 3000lm        | <i>W (system)</i>   | <i>lm/W (system)</i> | <i>CRI</i> | <i>CCT</i> | <i>White structure</i> |
|               | 24,0W               | 90lm/W               | >80        | 3000K      | 400.52.2.09.1          |
|               | 24,0W               | 95lm/W               | >80        | 4000K      | 400.53.2.09.1          |
| 1500lm DALI   | <i>W (system)</i>   | <i>lm/W (system)</i> | <i>CRI</i> | <i>CCT</i> | <i>White structure</i> |
|               | 10,9W               | 98lm/W               | >80        | 3000K      | 400.42.2.09.1.DALI     |
|               | 10,9W               | 103lm/W              | >80        | 4000K      | 400.43.2.09.1.DALI     |
| 3000lm DALI   | <i>W (system)</i>   | <i>lm/W (system)</i> | <i>CRI</i> | <i>CCT</i> | <i>White structure</i> |
|               | 24,2W               | 89lm/W               | >80        | 3000K      | 400.52.2.09.1.DALI     |
|               | 24,2W               | 94lm/W               | >80        | 4000K      | 400.53.2.09.1.DALI     |
| <i>Weight</i> | <i>Light source</i> | <i>Driver</i>        |            |            |                        |
| 4,45Kg        | LED included        | LED driver included  |            |            |                        |