



ICECUBE

Strong edges, straight lines and a diffuse lit shade, masking the integrated LED source and driver.

DESIGN

WACO

DESCRIPTION

Icecube is designed with a straight and sharp edged diffuser offering clear and diffused light, masking the LED source inside. The product can be customized by using different shade sizes or graphics.

LED INFO

3 Row LED boards ensuring a high output and great efficacy.

RANGE

Output range 1500lm (atmosphere light) or 3000lm (functional light) in 3000K or 4000K.


Equipped with an integrated fixed output driver or DALI driver.

POWER SUPPLY

230V (LED driver included)

INSTALLATION

Suspended by means of steel cables.

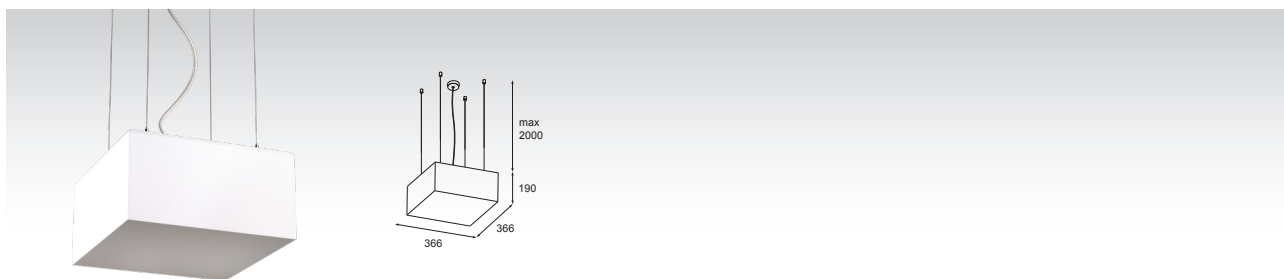

1500lm	<i>W (system)</i>	<i>lm/W (system)</i>	<i>CRI</i>	<i>CCT</i>	<i>White structure</i>
	10,7W	100lm/W	>80	3000K	400.42.2.09.1
	10,7W	105lm/W	>80	4000K	400.43.2.09.1
3000lm	<i>W (system)</i>	<i>lm/W (system)</i>	<i>CRI</i>	<i>CCT</i>	<i>White structure</i>
	24,0W	90lm/W	>80	3000K	400.52.2.09.1
	24,0W	95lm/W	>80	4000K	400.53.2.09.1
1500lm DALI	<i>W (system)</i>	<i>lm/W (system)</i>	<i>CRI</i>	<i>CCT</i>	<i>White structure</i>
	10,9W	98lm/W	>80	3000K	400.42.2.09.1.DALI
	10,9W	103lm/W	>80	4000K	400.43.2.09.1.DALI
3000lm DALI	<i>W (system)</i>	<i>lm/W (system)</i>	<i>CRI</i>	<i>CCT</i>	<i>White structure</i>
	24,2W	89lm/W	>80	3000K	400.52.2.09.1.DALI
	24,2W	94lm/W	>80	4000K	400.53.2.09.1.DALI
<i>Weight</i>	<i>Light source</i>	<i>Driver</i>			
4,45Kg	LED included	LED driver included			