



RAA

elegantly designed for elegant applications

DESIGN

WACO

DESCRIPTION

Raa has been designed as compact and stylish track spotlight without making any compromise on its looks. In the front of the powder coated aluminium cylindrical housing is an anti-glare baffle for optical comfort. In the back is a fine stem which tilts the housing and connects to the track adapter.

LED INFO

The Cree COB modules come in a variety of options of beam angle, output and colour temperature.

RANGE

Raa comes as a track mounted luminaire with the LED driver integrated in the track. The output is either 1000lm (CRI90) or 1300lm (CRI80) in 2700, 3000 and 4000K, all in a spot, medium and flood beam. Standard colours are structural white and black in combination with a black baffle, however the product and/or baffle can be easily customized in other RAL colours or colour combinations, creating playful and colourful details.

POWER SUPPLY


Raa has an integrated LED driver in the track adapter, available as DALI dimmable as well as non-dimmable.

INSTALLATION

Track mounted by means of universal 3-phase track adapter.

DALI track options: Global Trac Pulse, Stucchi Onetrack, Fagerhult Control Track.




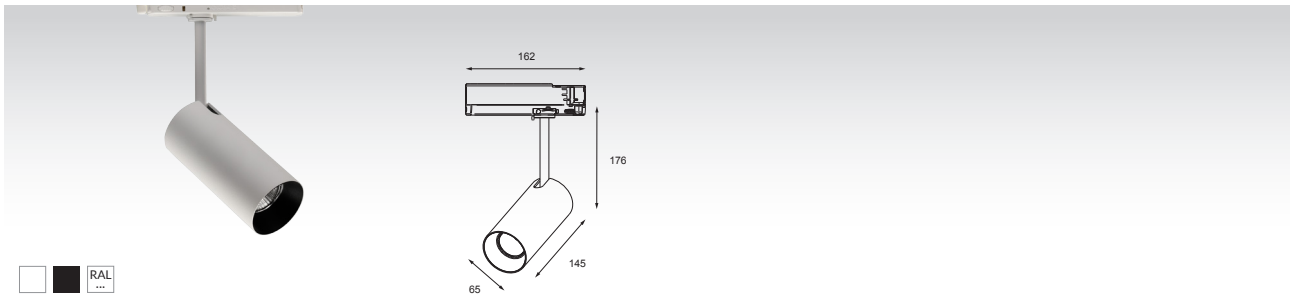


1300lm	W (system)	lm/W (system)	CRI	CCT	White structure	Black structure
spot	12,1W	90lm/W	>80	2700K	670.11.RA.09.1	670.11.RA.17.1
	12,1W	90lm/W	>80	3000K	670.11.RB.09.1	670.11.RB.17.1
	12,1W	97lm/W	>80	4000K	670.11.RC.09.1	670.11.RC.17.1
medium	12,1W	91lm/W	>80	2700K	670.11.RA.09.2	670.11.RA.17.2
	12,1W	91lm/W	>80	3000K	670.11.RB.09.2	670.11.RB.17.2
	12,1W	98lm/W	>80	4000K	670.11.RC.09.2	670.11.RC.17.2
flood	12,1W	90lm/W	>80	2700K	670.11.RA.09.3	670.11.RA.17.3
	12,1W	90lm/W	>80	3000K	670.11.RB.09.3	670.11.RB.17.3
	12,1W	97lm/W	>80	4000K	670.11.RC.09.3	670.11.RC.17.3

1000lm	W (system)	lm/W (system)	CRI	CCT	White structure	Black structure
spot	12,1W	63lm/W	>90	2700K	670.11.RD.09.1	670.11.RD.17.1
	12,1W	73lm/W	>90	3000K BBBL	670.11.BE.09.1	670.11.BE.17.1
	12,1W	84lm/W	>90	4000K	670.11.RF.09.1	670.11.RF.17.1
medium	12,1W	64lm/W	>90	2700K	670.11.RD.09.2	670.11.RD.17.2
	12,1W	74lm/W	>90	3000K BBBL	670.11.BE.09.2	670.11.BE.17.2
	12,1W	85lm/W	>90	4000K	670.11.RF.09.2	670.11.RF.17.2
flood	12,1W	63lm/W	>90	2700K	670.11.RD.09.3	670.11.RD.17.3
	12,1W	73lm/W	>90	3000K BBBL	670.11.BE.09.3	670.11.BE.17.3
	12,1W	84lm/W	>90	4000K	670.11.RF.09.3	670.11.RF.17.3

Weight	Light source	Driver
0,60Kg	LED included	LED driver included

Honeycomb accessory	Black
	670.00.1.17.0

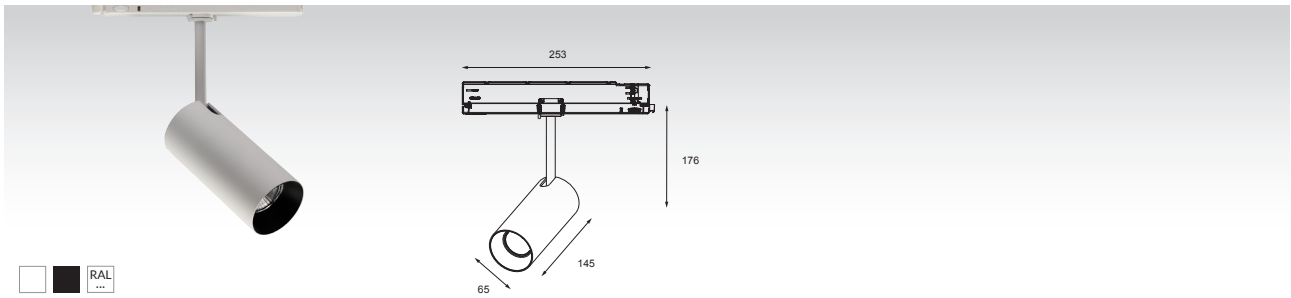

1300lm	W (system)	lm/W (system)	CRI	CCT	White structure	Black structure
spot	12,8W	88lm/W	>80	2700K	670.11.RA.09.1.DALI	670.11.RA.17.1.DALI
	12,8W	88lm/W	>80	3000K	670.11.RB.09.1.DALI	670.11.RB.17.1.DALI
	12,8W	96lm/W	>80	4000K	670.11.RC.09.1.DALI	670.11.RC.17.1.DALI
medium	12,8W	90lm/W	>80	2700K	670.11.RA.09.2.DALI	670.11.RA.17.2.DALI
	12,8W	89lm/W	>80	3000K	670.11.RB.09.2.DALI	670.11.RB.17.2.DALI
	12,8W	97lm/W	>80	4000K	670.11.RC.09.2.DALI	670.11.RC.17.2.DALI
flood	12,8W	88lm/W	>80	2700K	670.11.RA.09.3.DALI	670.11.RA.17.3.DALI
	12,8W	88lm/W	>80	3000K	670.11.RB.09.3.DALI	670.11.RB.17.3.DALI
	12,8W	96lm/W	>80	4000K	670.11.RC.09.3.DALI	670.11.RC.17.3.DALI
1000lm	W (system)	lm/W (system)	CRI	CCT	White structure	Black structure
spot	12,8W	63lm/W	>90	2700K	670.11.RD.09.1.DALI	670.11.RD.17.1.DALI
	12,8W	77lm/W	>90	3000K BBBL	670.11.BE.09.1.DALI	670.11.BE.17.1.DALI
	12,8W	83lm/W	>90	4000K	670.11.RF.09.1.DALI	670.11.RF.17.1.DALI
medium	12,8W	64lm/W	>90	2700K	670.11.RD.09.2.DALI	670.11.RD.17.2.DALI
	12,8W	79lm/W	>90	3000K BBBL	670.11.BE.09.2.DALI	670.11.BE.17.2.DALI
	12,8W	84lm/W	>90	4000K	670.11.RF.09.2.DALI	670.11.RF.17.2.DALI
flood	12,8W	63lm/W	>90	2700K	670.11.RD.09.3.DALI	670.11.RD.17.3.DALI
	12,8W	77lm/W	>90	3000K BBBL	670.11.BE.09.3.DALI	670.11.BE.17.3.DALI
	12,8W	83lm/W	>90	4000K	670.11.RF.09.3.DALI	670.11.RF.17.3.DALI

Weight	Light source	Driver
0,63Kg	LED included	LED driver included

Honeycomb accessory	Black
	670.00.1.17.0